


**BMS 16-30**

**φ16 , 2.80 mNm**

with Hall sensors

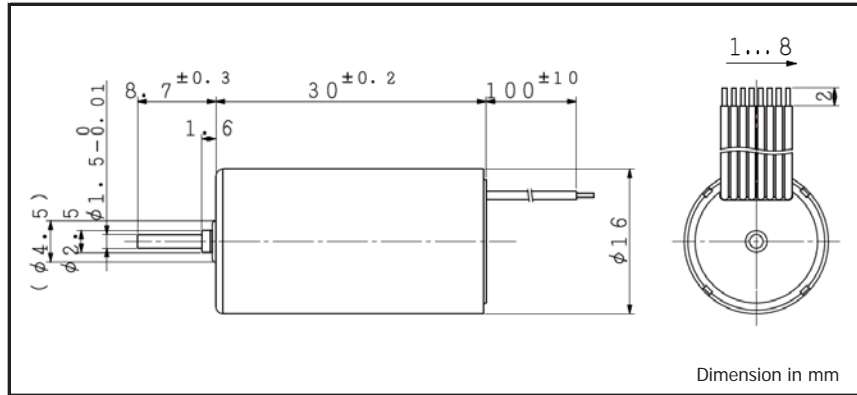

For combination with gearhead: SSG15, SPG16




Ordering number	BMS16-3001	BMS16-3002	BMS16-3009	
1 Nominal voltage	7.4	12.0	24.0	V
2 Rated torque	3.00	2.96	2.83	mNm
3 Rated speed	15900	16300	16200	rpm
4 Rated current	814	510	245	mA
5 No load speed	17300	17800	17800	rpm
6 No load current	74	47	23	mA
7 Stall torque	36.12	35.43	32.60	mNm
8 Stall current	9.00	5.59	2.57	A
9 Output power	16.4	16.5	15.2	W
10 Max. efficiency	83	83	82	%
11 Terminal resistance	0.82	2.15	9.32	Ω
12 Friction torque	0.30	0.30	0.30	mNm
13 Back-EMF constant	0.424	0.669	1.338	mV/rpm
14 Torque constant	4.05	6.39	12.78	mNm/A
15 Slope of N-T curve	479	502	545	rpm/mNm
16 Mechanical time constant	2.95	3.09	3.36	ms
17 Rotor inertia	0.59	0.59	0.59	gcm <sup>2</sup>
18 Max. torque	18.06	17.71	16.30	mNm

Mechanical data		
19 Shaft radial play	0.015	mm
20 Shaft axial play	0.23	mm
21 Max. shaft radial load	0.27 (3.7 mm)	N
22 Max. shaft axial load	0.1	N
23 Max. shaft axial load at standstill	20	N

Environmental specifications		
24 Operating temperature	-20 ~ 80	°C
25 Max. coil temperature	90	°C

Other specifications		
26 Weight	42	g

Electrical connections		
#1	Hw	Hall sensor output W
#2	Hv	Hall sensor output V
#3	Hu	Hall sensor output U
#4	Vdd	Input signal 3.0V
#5	Lw	Motor winding W
#6	Lv	Motor winding V
#7	Lu	Motor winding U
#8	Gnd	GND

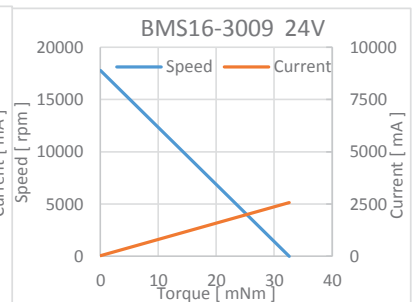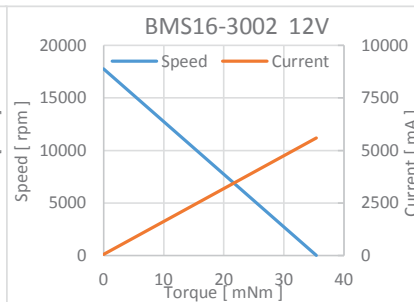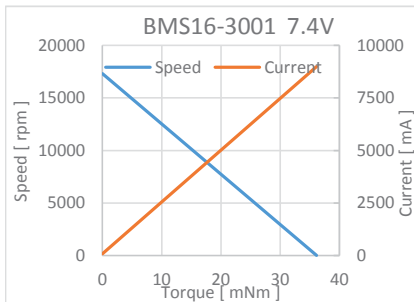

V01